




Disassembling PlayStation 2 Slimline Outer Shell

This guide will show you how to disassemble the outer shell of the PlayStation 2 Slimline. When opened, you will be able to access all interior components.

Written By: Thomas Sullivan

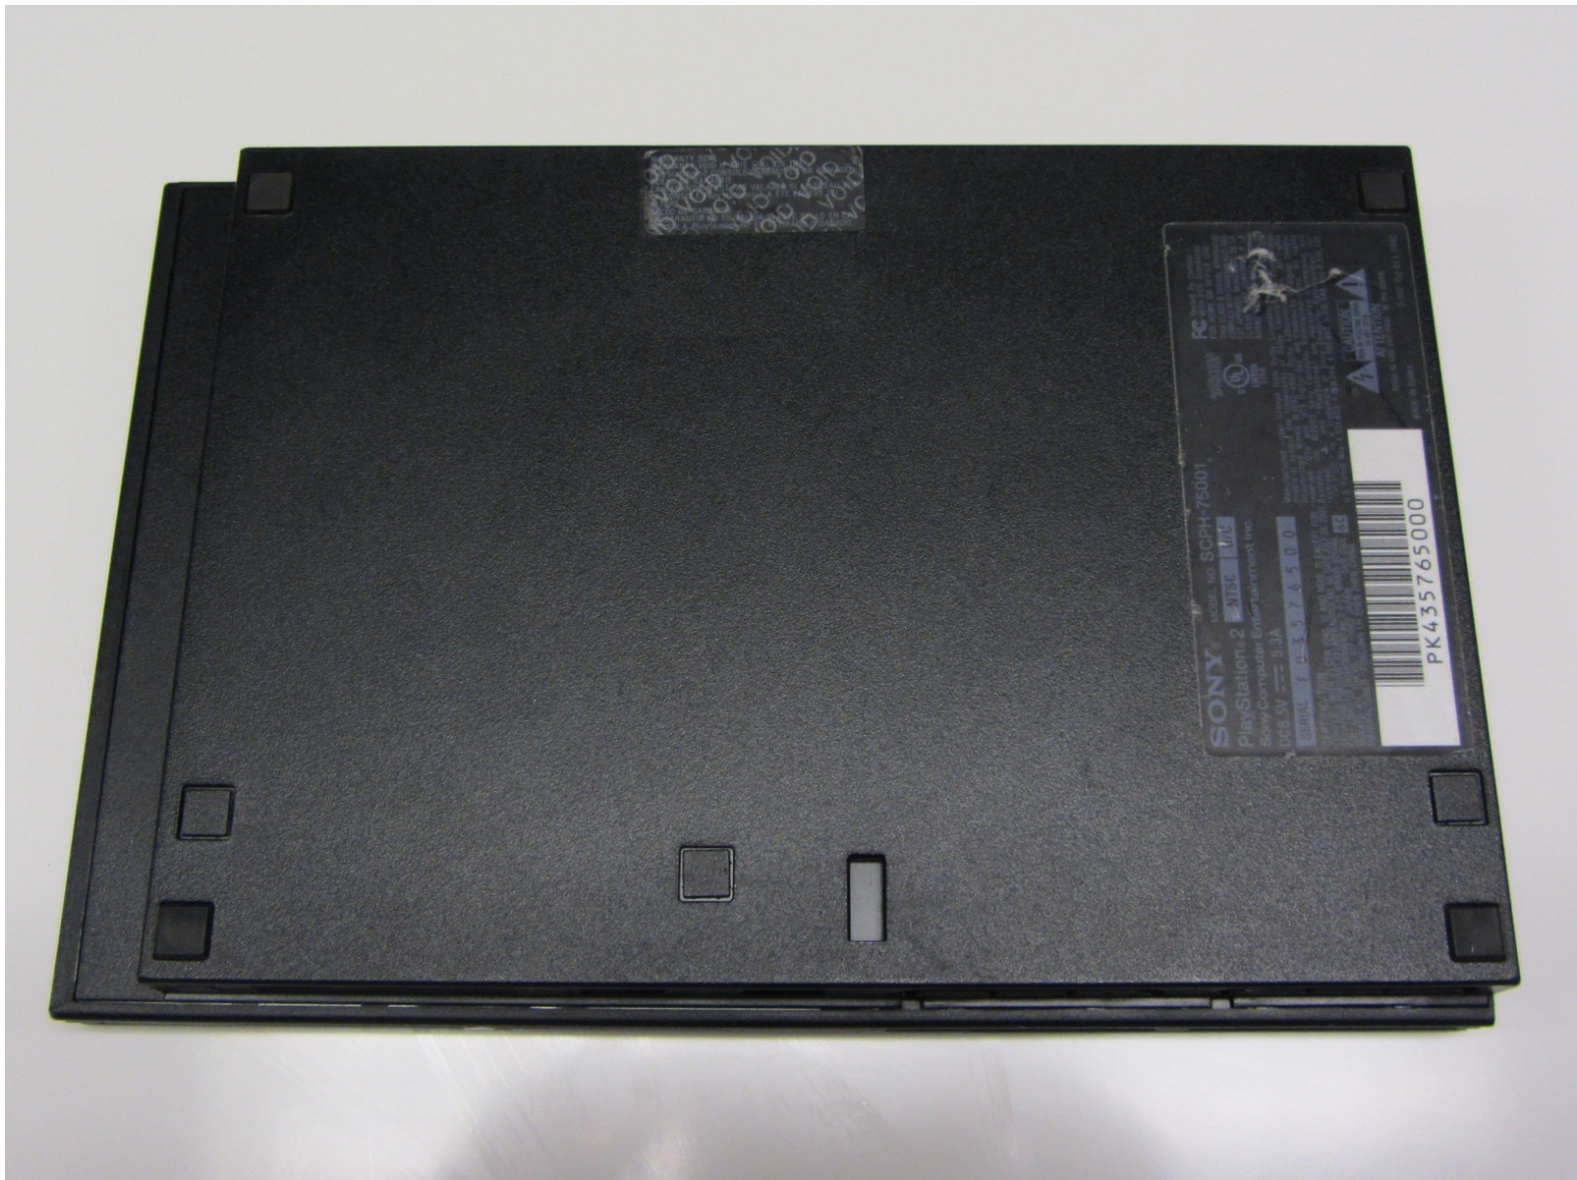



TOOLS:




- [Phillips #1 Screwdriver](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Outer Shell




- Disconnect all cables from the console and flip the unit over to reveal its base.

Step 2

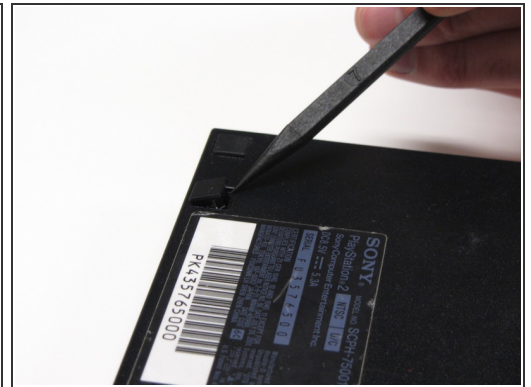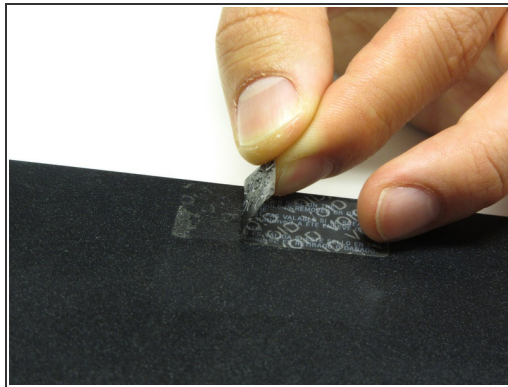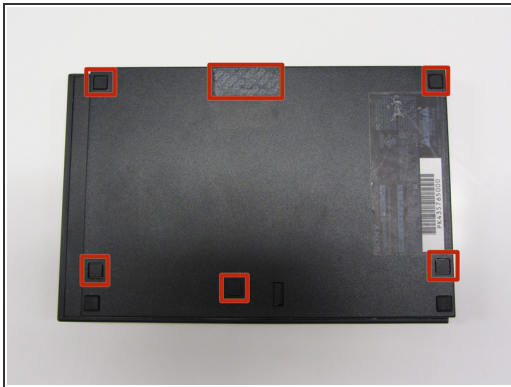



- Locate the 6 feet on the base of the unit. Pry them off using a spudger to reveal the screws.
- ⓘ Note: One of the feet is located under the sticker shown in the photo. Removing this sticker will void any warranty with Sony.

Step 3

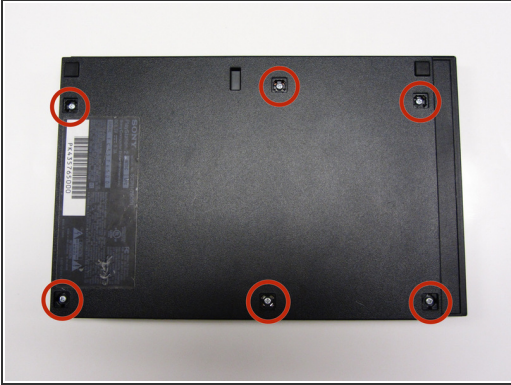

- Remove all six 4.0 mm screws from the base of the unit using a #1 Phillips screwdriver.

Step 4

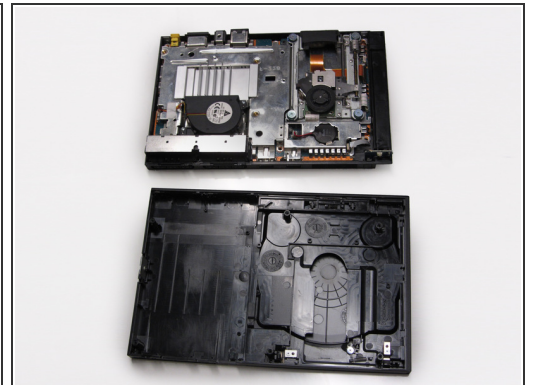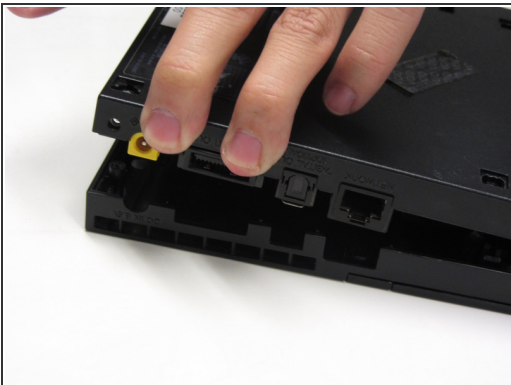

- Starting at the corner at which the power and Ethernet ports are located, pry open the outer shell using a spudger and continue around the entire unit.

i Note: You may use your hands for additional force to separate the two pieces of the outer shell.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-19 03:45:33 AM.